Zinc-plated

FYT
FIJAMOS EL MUNDO

10100063 FYT RCH 6,3

Material	AISI 1018 steel		Diameter (mm)	6,3
Heat treatment	Austenitising + quenching + tempering		Drilling capacity	-
Corrosion protection	Zinc-plated - Delta Tone	Hardness	Surface	450 HV
Lengths (mm)	13 - 260		Core	390 HV
Shear failure load	10,780 N		Tensile failure load	14.000 N



Maximum pull-out force (N)*

Thickness (mm)	4,00	5,00	6,00	8,00	9-20
Hole Ø (mm)	5,3	5,6	5,7	5,8	5,8/5,9
Force (N)	10.850	13.700	14.000**	14.000**	14.000**


*. Mean test value. **. Failure by fracture



Maximum pull-over force (N)*

Thickness (mm)	0,50	0,60	0,70	0,80	1,00
Without washer (N)	840	1.008	1.176	1.344	1.680
P 16 washer (N)	1.120	1.344	1.568	1.792	2.240
P 18 washer (N)	1.260	1.512	1.764	2.016	2.520


*. Values obtained from the Spanish structural steel code for an ST37 sheet (350 N/mm2)



Maximum shear force (N)

Thickness (mm)	0,75	0,88	1,00	0,75	0,88	1,00
Section (mm)	4,00	4,00	4,00	8,00	8,00	8,00
Force (N)	4.570	4.520	6.740	4.590	6.250	7.280

*. Values obtained from the Spanish structural steel code for an ST37 sheet (350 N/mm2)



Head
Hexagonal
10 mm



Zinc-plated

www.faytexsl.com C/ Palier, 19 · 28914 Leganés (Madrid) Spain ☎ +34 916 945 561

Translation of the Spanish version; it may contain errors.

10100063 FYT RCH 6,3

FYT
FIJAMOS EL MUNDO

The values in table 1 are mean test values (ẋ). The following factors are recommended according to CEN/TS 17659:

Table 2 - Recommended material partial (safety) factors for fastening in structural decks of different marterials

Material of structural deck	Nominal thickness	Characteristics [a]	γM
Steel according to EN 10346	0,50 ≤ t < 0,70 mm	yield strength ≥ 280 N/mm^2	2,0
	t ≥ 0,70 mm	yield strength ≥ 280 N/mm^2	1,8
Aluminium according to EN 485	t ≥ 0,70 mm	yield strength ≥ 195 N/mm^2	2,0 [b]
Concrete according to EN 206		Minimum C12/15	2,1 [c]
Light weight concrete according to EN 12602		≥ 500 kg/m^3	3,0 [b]

Material of structural deck	Nominal thickness	Characteristics [a]	γM
Wood - soft wood according to EN 338	t ≥ 20 mm	Minimum C24	1,86 [d]
OSB according to EN 300	t ≥ 18 mm	Minimum OSC/3	1,86 [d]
Plywood according to EN 636	t ≥ 18 mm	Minimum Service class 2 (EN 1995-1-1) Intended application = Structural S	1,86 [d]

a. Recommended for new structural decks.
b. This recommended value is based on hnowledge / experience.
c. This value is based on γ_{inst} = 1,4.
d. γM is the total safety based on κ_{mod} = 0,7 according EC 5.

Example of fastener strength calculation:




Data: Steel purlin 6 mm / Sheet 0,8 mm / FYT RCH 6,3 with washer 18

1. Tensile strength:
   - From the data sheet values:
     Wtest = 14.000 N/fastener
   - Apply 90% reduction factor:
     Wchar = 12.600 N/fastener
   - Apply safety factor:
     Wadm = 7.000 N/fastener

2. Pull-over resistance:
   - From the data sheet values:
     Wadm = 2.016 N/fastener

The lower of these values is used

Design value of the fasteners: Wadm = 2.016 N/fastener.

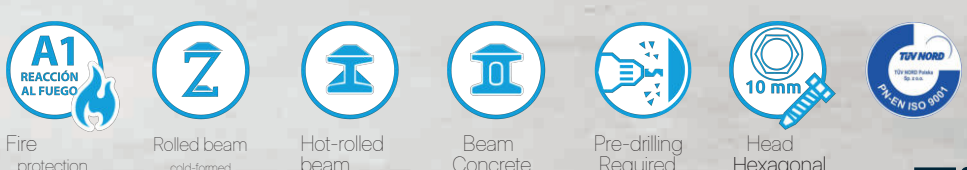

Fire protection | Rolled beam cold-formed | Hot-rolled beam | Beam Concrete | Pre-drilling Required | Head Hexagonal

Zinc-plated

www.faytexsl.com
C/ Palier, 19 · 28914 Leganés (Madrid) Spain
+34 916 945 561

Translation of the Spanish version; it may contain errors.